



REVERSO-MANUFACTURING LTD.

MANUFACTURERS OF
FIREPLACE EQUIPMENT AND ACCESSORIES

790 ROWNTREE DAIRY ROAD • WOODBRIDGE, ONTARIO L4L 5V3 • PHONE 851-6701 FAX # 851-8376


HF The Heat Form Circulating Fan



Le ventilateur circulateur de chaleur



A truly energy conservation product

Un produit conservant vraiment l'énergie

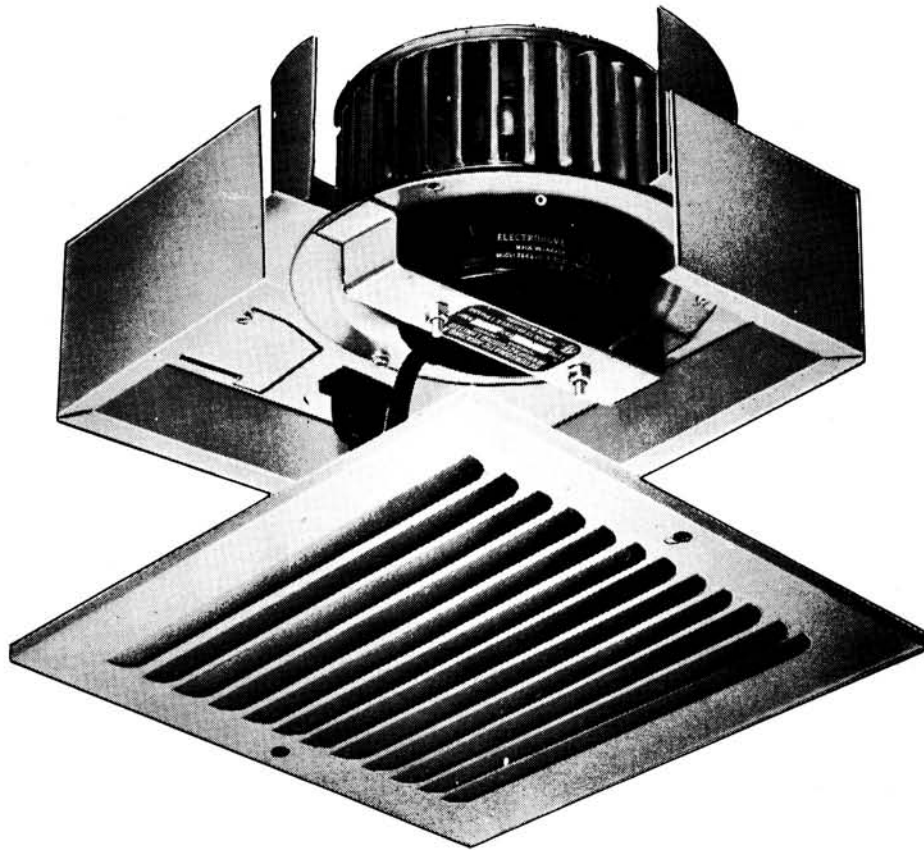

- Extra quiet operation.
- Airflow of 58 C.F.M. at .1 Static Pressure per fan.
- High Heat Recovery—approximately 6,000 B.T.U. per hr. (when intake air temperature is 63°F and outlet air temperature is 115°F).
- Attractive 8" x 9" Grilles in the following colours
 - B.C. Brushed Copper
 - P.B. Polished Brass
 - A.B. Antique Brass
 - B. Black
 - A.G. Antique Gold
 - S.S. Swedish Steel

- Fonctionnement ultra silencieux.
- Flux d'air de 58 C.F.M. à une pression statique de .1 par ventilateur.
- Grande récupération thermique, approximativement de 6000 BTU par heure. (où la température est de 63°F à la prise d'air et de 115°F à la sortie d'air).
- Attrayantes grilles offertes dans les couleurs suivantes.
 - B.C. Cuivre
 - P.B. Bronze poli
 - A.B. Bronze antique
 - B. Noir
 - A.G. Doré antique
 - S.S. Acier suédois

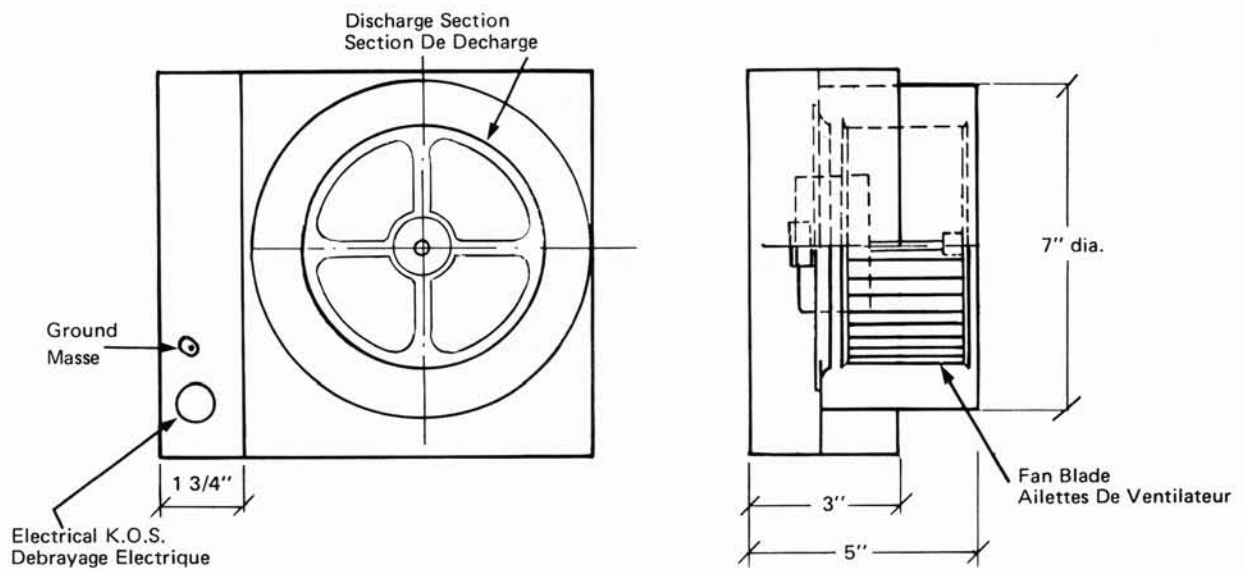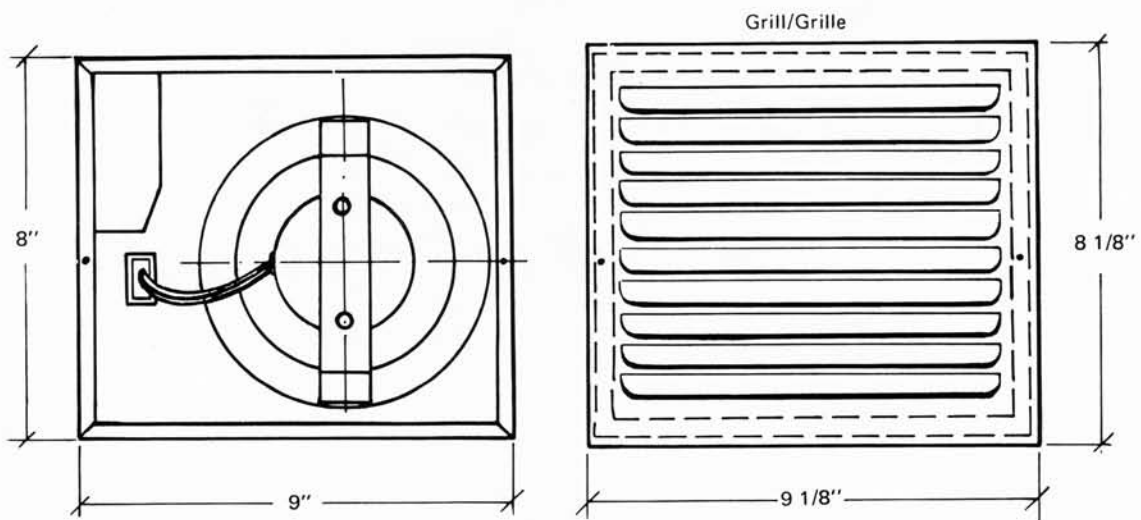

Performance Characteristics Caractéristique Du Fonctionnement						
Model Modele	RPM	Amps	Static Pressure Pression Statique			CFM VS
			.1	.2	.25	.3
HF	1400	0.6	58	50	45	40



REVERSO-MANUFACTURING LTD.

MANUFACTURERS OF
FIREPLACE EQUIPMENT AND ACCESSORIES

790 ROWNTREE DAIRY ROAD • WOODBRIDGE, ONTARIO L4L 5V3 • PHONE 851-6701 FAX # 851-8376