

# DIRECT VENT FORCED DRAFT FreeStanding Slim Line GAS FIREPLACE

Model DVF-200



Freestanding

**CLEAN, COMPACT & EASY TO INSTALL  
SUPER QUIET • VENT FAN • .5 SONES**

*Introducing the Perfect Solution  
where venting is a problem.  
The DVF-200 Direct Vent Forced  
Draft fireplace gives the flexibility  
of 45° horizontal venting.  
Can be installed as built-in or  
freestanding unit*



Built-in



REVERSO MANUFACTURING LTD



# DIRECT VENT FORCED DRAFT GAS FIREPLACE

## Termination kit and venting system have been tested & designed for high rise condominiums

No need to worry about exhaust fumes and no need to keep doors and windows open since no room air is used for combustion. All necessary air for combustion is drawn from the outside



through the specially designed double wall vent and by-products of combustion are vented directly outside. Heat delivered to the room stays in the room.

### STANDARD FEATURES

- Natural Gas or Propane. Push Button Ignition.
- High efficiency - Stainless Steel Dual Burners.
- Fast Acting Pilot Safety Shut-off.
- Combination Ceramic Fiber / Cast Natural Look Split Logs.
- High Temperature Glass Door - Shock Resistant.
- Sealed Combustion 4" - 6" Coaxial Vent System.
- Glowing Embers / Glowing Logs. Realistic Flame.
- Compact Design. Air Tight Construction.
- Venting Versatility (Rear or Top Vent).
- Adjustable Flame Height.
- Easy Access, Hinged Door (No Tools Required).
- Vent Blower.

### OPTIONAL FEATURES

- Electronic Ignition.
- Sidewall Vent Kit. Flush mount or surface mount
- Rooftop Vent Kit.
- Venting Pipes.
- Remote Control.
- Wall Thermostat - Manual Flame Control.
- Automatic Self Modulating Gas Control.
- 125 CFM Variable Speed Circulation Fan.
- Vent Riser Kit (For Below Grade Installations).
- Polished or Brushed Brass Trim (For Recessed Zero Clearance Kit).
- Gold Plated Door Assembly.
- Center Log.
- Bay Door or Arch Door.

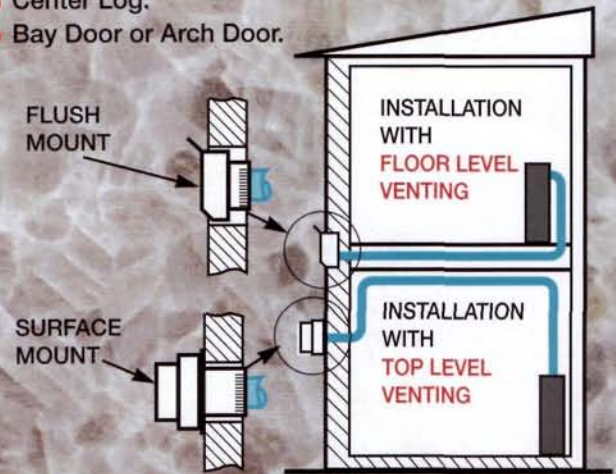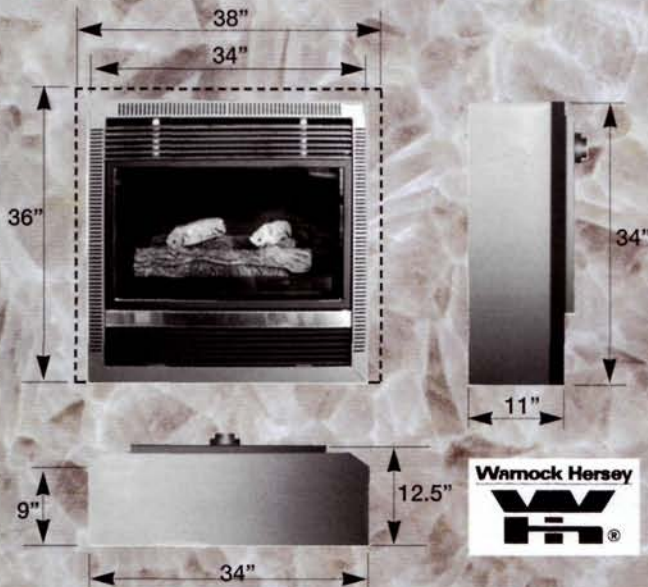

### SPECIFICATION

	Natural Gas	Propane
Max. BTUH input	22,000	20,000
Min. BTUH input	15,000	15,000
Annual Fuel Utilization Eff.	up to 73%	
Efficiency (fan on)	up to 74%	

### Clearances To Combustibles

Recessed: Top:0" Sides:0" Rear:0" Floor:0"  
Optional zero clearance kit must be installed

Non Recessed: Top:2" Sides:2" Rear: 1/2" Floor:0"

All specifications are subject to change without notice, due to ongoing product improvements.



REVERSO MANUFACTURING LTD

790 ROWNTREE DAIRY ROAD,  
 WOODBRIDGE, ONTARIO, CANADA L4L 5V3  
 TEL.: (905) 851-6701 FAX: (905) 851-8376

AUTHORIZED DEALER

