

Modern
Manufacture of
eXcellence

WOODSTOVE

CHALLENGER MMX

NON-CATALYTIC HIGH-TECH STOVE

Designed for Mobile Home and Residential Installation



A Clean Approach
EPA WOOD STOVE 2.65 GM./HR.

CHALLENGER MMX

- Extra large 162 Sq. inch viewing area
- Optional Fresh "Make Up" Air Kits Available
- Low Clearance to Combustibles
- Clear Glass at ALL TIMES:
Utilizing Heated Air Wash System
- High Efficiency of 65.21
- Easy to Operate: Single Draft Control
- Ultra Clean Operation (Even on Low Burn)

TECHNICAL DATA

Dimensions:	Width - 26.5" (673 mm)
	Depth - 23" (584 mm)
	Height - 31.25" (806 mm)
Flue Size:	6" (152 mm) Diameter.
Maximum Log Length	20" (508 mm)
Heating Capacity:	1200 - 1700 sq.ft
Maximum Heat Output**	38,000 btu/hr
Emission**	2.6g m/hr. (with blower in operation)
Efficiency**	65.21%
Blower Capacity	165 cfm
Maximum Burn Time	Approximately 8-10 hrs
Weight	345 lbs (157 kg)

*It should be noted that heat output, heating capacity and burn duration tests are done with seasoned hardwood. Your results may be different than shown depending upon chimney characteristics, fuel, atmospheric conditions, air tightness and insulation of the structure being heated.

Tested and Listed to CSA B336.2/ULC S627/UL1482 by Warnock Hersey Professional Services LTD.

For more information refer to stove manual.


WARRANTY

5 Years all parts.
Blower - 1 year warranty




790 RONWNTREE DAIRY ROAD
WOODBRIDGE, ONTARIO, CANADA L4L 5V3
TEL.: (905) 851-6701 FAX: (905) 851-8376

From the finest in today's High-Tech Woodstove comes the CHALLENGER MMX. A smart approach to clean air unique design. Stainless Steel combustible chamber removable for inspection. Patent pending.

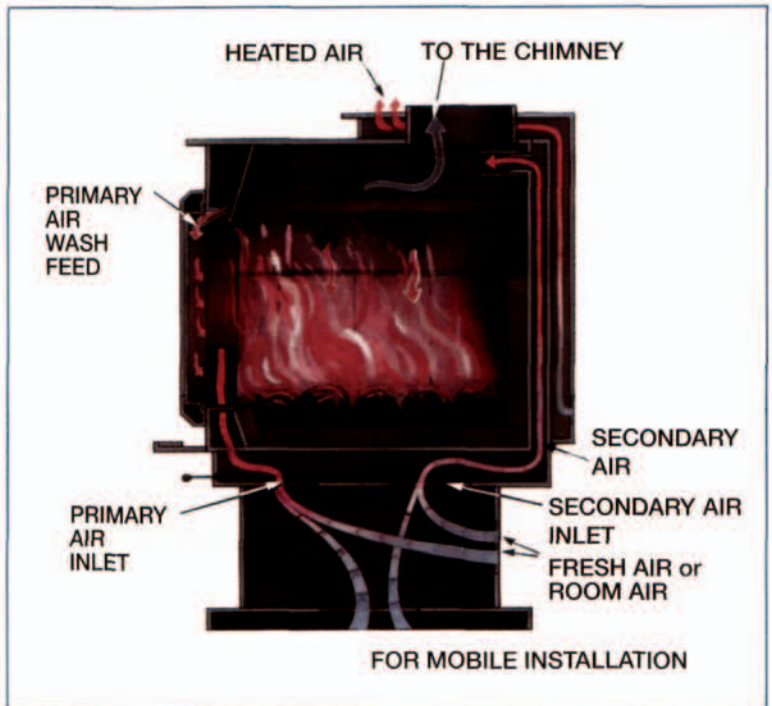

CONTACT LOCAL BUILDING OFFICIALS ABOUT RESTRICTIONS AND INSTALLATION INSPECTIONS IN YOUR AREA

MINIMUM CLEARANCE TO COMBUSTIBLE MATERIALS IN INCHES (MILLIMETERS)

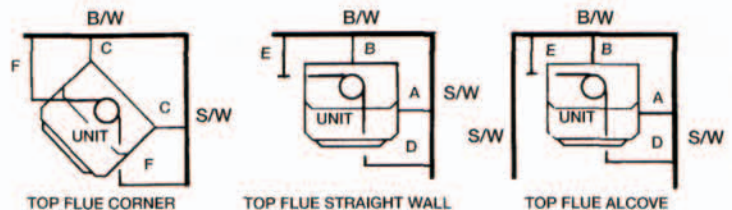

FROM HEATER

RESIDENTIAL						MOBILE HOME		
SINGLE WALL CHIMNEY CONNECTOR			DOUBLE WALL CHIMNEY CONNECTOR			DOUBLE WALL CHIMNEY CONNECTOR		
A	B	C	A	B	C	*A	*B	C
18	18	16	12	15	8	12	15	8
(457)	(457)	(406)	(305)	(381)	(203)	(305)	(381)	(203)
FROM CHIMNEY CONNECTOR								
D	E	F	D	E	F	*D	*E	F
28	21.5	27	22	18.5	19	22	18.5	19
(711)	(546)	(686)	(559)	(470)	(483)	(559)	(470)	(483)

AVAILABLE AT