

**DIRECT VENT FREESTANDING OR BUILT-IN GAS FIREPLACE**

# *See A Beauty Of A Multi-Sided Fireplace From Any Angle*

Model DVD400



**clean, compact,  
easy to install**

3 sided view shown (see other options of installation on the back page)



**REVERSO MANUFACTURING LTD**

# MULTI-SIDED DIRECT VENT GAS FIREPLACE

No need to worry about exhaust fumes and no need to keep doors and windows open since no room air is used for combustion. All necessary air for combustion is drawn from the outside through

the specially designed double wall vent and by-products of combustion are vented directly outside. Heat delivered to the room stays in the room.


## STANDARD FEATURES

- Natural Gas or Propane. Push Button Ignition.
- High efficiency Burner.
- Fast Acting Pilot Safety Shut-off.
- Combination Ceramic Fiber / Cast Natural Look Split Logs.
- High Temperature Glass Door - Shock Resistant.
- Sealed Combustion 4" - 8" Coaxial Vent System.
- Glowing Logs. Realistic Flame.
- Compact Design. Air Tight Construction.
- Adjustable Flame Height.
- Easy Access, Hinged Door (No Tools Required).

## OPTIONAL FEATURES

- Sidewall Vent Kit.
- Rooftop Vent Kit.
- Recessed Zero Clearance Kit.
- Remote Control.
- Wall Thermostat - Manual Flame Control.
- Automatic Self Modulating Gas Control.
- 125 CFM Variable Speed Circulation Fan.
- Vent Riser Kit (For Below Grade Installations).
- Polished or Brushed Brass Trim (For Recessed Zero Clearance Kit).
- Gold Plated Door Assembly.

The REVERSO Multi-Sided Fireplace is available in various of options: it can be vented vertically or horizontally (see instruction manual). This Fireplace combines a spectacular view with the efficiency of a wall heater.

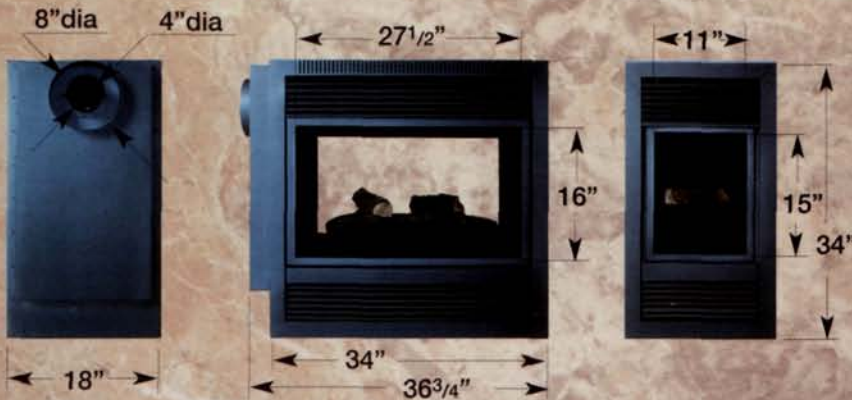

2 sided view



Corner installation

## Clearances To Combustibles

Recessed: Top:0" Side: 2" Rear: 2" Floor: 0" Vent: 2"  
*Optional zero clearance kit must be installed*

Non Recessed: Top:2" Side:4" Rear: 4" Floor: 0" Vent: 2"

All specifications are subject to change without notice, due to ongoing product improvements.

## SPECIFICATION

	NATURAL GAS	PROPANE
Max. BTUH input	24,000	24,000
Min. BTUH input	18,000	18,000
Annual Fuel Utilization Eff.	up to	66%
Efficiency (fan on)	up to	80%

AUTHORIZED DEALER



**REVERSO  
MANUFACTURING LTD**

790 ROWNTREE DAIRY ROAD,  
WOODBRIDGE, ONTARIO, CANADA L4L 5V3  
TEL.: (905) 851-6701 FAX: (905) 851-8376